

TA 260 / 460

BATTERY POWERED
PLASTIC STRAPPING TOOLS



KONTAKT

Anke Freitag
+49 2336 808295
afreitag@titan-schwelm.de

FEATURES

- Opening lever free
- Bluetooth connection & mobile APP
- Digital control Panel
- Very fast in tensioning and welding
- Automatic / Semi Automatic / Manual Soft Tensioning Mode
- Easy change of strap width

BENEFITS

- Wide range & adjustable tension
- Lightweight and well balanced
- Friction weld and high seal efficiency
- Easy access to wearing parts
- Strong and well protected motor housing

Introducing the TA260 and TA460: groundbreaking and innovative battery-powered strapping tools designed for 13 to 19mm PP and PET straps. Lightweight, well-balanced, ergonomic, and user-friendly, the new TA Series offers three versatile operating modes: fully automatic, semi-automatic, and manual.

As the TA260/TA460 does not require the traditional opening lever, it offers an efficient and fast strapping result. Its integrated Bluetooth connectivity allows you to set, monitor, and update the tool directly from your mobile devices, with an app available for both Android and iOS systems.

Powered by advanced brushless motors, the TA260/TA460 delivers rapid strapping operations with minimal maintenance and enhanced electronic control. Its high-efficiency, long-lasting Li-Ion battery supports over 400 cycles per charge, all without memory effect. The TA260/TA460 also features Soft Tensioning Mode, making it adaptable for various applications—from timber to logistics, steel to brick industries, and beyond.

Discover the TA260/TA460 and revolutionize your strapping operations today.

TA 260

13 – 16 mm



Technical Data

Kind of drive (tensioning + sealing)	Electric
Tension force	500 – 2.500 N (adjustable)
Power supply system	Li-Ion 18 V - 5 Ah
Strap feeding speed	11 m/min.
Dimensions	325 x 135 x 135 mm (L x B x H)
Weight	4,4 kg

Strap/Joint

Type of strap	Plastic strap
Strap	PP / PET
Strap width	13 mm, 16 mm (0.51" – 0.63")
Strap thickness	0,50 – 1,05 mm (0.019" – 0.041")
Kind of seal	friction weld
Sealing strength	Approx. 75% of the strap breaking load (depending on the belt quality, belt dimension)

Application

Strapping of flat packages (e.g. palletized goods) for mobile use.

CONTACT

Anke Freitag
+49 2336 808295
afreitag@titan-schwelm.de

TA 460

16 – 19 mm



Technical Data

Kind of drive (tensioning + sealing)	Electric
Tension force	900 – 4.500 N (adjustable)
Power supply system	Li-Ion 18 V - 5 Ah
Strap feeding speed	6 m/min.
Dimensions	330 x 140 x 142 mm (L x B x H)
Weight	4,6 kg

Strap/Joint

Type of strap	Plastic strap
Strap	PP / PET
Strap width	16 mm, 19 mm (0.63" – 0.75")
Strap thickness	0,70 – 1,3 mm (0.028" – 0.051")
Kind of seal	friction weld
Sealing strength	Approx. 75% of the strap breaking load (depending on the belt quality, belt dimension)

Application

Strapping of flat packages (e.g. palletized goods) for mobile use.

CONTACT

Anke Freitag
+49 2336 808295
afreitag@titan-schwelm.de

TA 260 / 460

BATTERY POWERED
PLASTIC STRAPPING TOOLS




CONTACT

Anke Freitag
+49 2336 808295
afreitag@titan-schwelm.de

TA 260 / 460

BATTERY POWERED
PLASTIC STRAPPING TOOLS

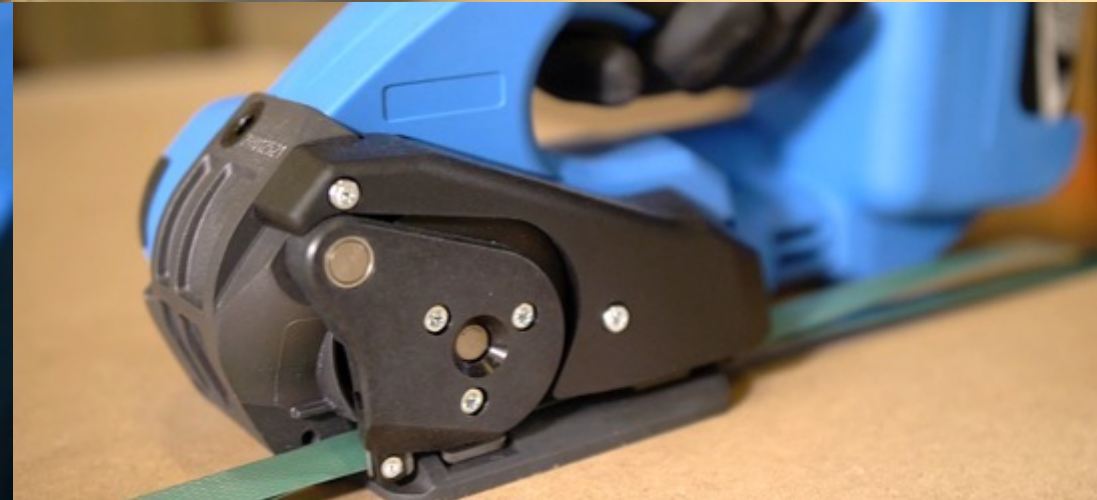

CONTACT

Anke Freitag
+49 2336 808295
afreitag@titan-schwelm.de



TRADITION VERBINDET • SEIT 1842

Unternehmen der Lenzen Gruppe / Companies of Lenzen Group:

TITAN 
Wir halten zusammen

pw**LENZEN** 

BI-NA-TEC
Industrie-Systemtechnik GmbH

erapa**LENZEN** 
verpackungssysteme

Lenzen Gruppe

Berliner Straße 51-55

58332 Schwelm

+49 2336 808 111

sekretariat@lenzen-Gruppe.de